



ENVIRONMENTAL BUILDING PRODUCTS ENDURO-KOTE WALKING DECK AND ROOF COVERING SYSTEM

CSI Section: 07 18 13 Pedestrian Traffic Coatings

1.0 RECOGNITION

Environmental Building Products' Enduro-Kote walking deck and roof covering system recognized in this report has been evaluated for durability, weather resistance, wind uplift resistance and fire classification. The following code editions are recognized:

- 2015 and 2012 International Building Code® (IBC)
- 2015 and 2012 International Residential Code® (IRC)

2.0 LIMITATIONS

2.1 The Enduro-Kote walking deck and roof covering system shall be manufactured, identified and installed in accordance with this report and the applicable code. In the event of a conflict this report governs.

2.2 The Enduro-Kote walking deck and roof covering system shall be installed on slopes not less than one unit vertical in 48 units horizontal (2-percent slope).

2.3 The supporting structure must be designed to support the loads and is beyond the scope of this report.

3.0 PRODUCT USE

3.1 General: Environmental Building Products' Enduro-Kote walking deck and roof covering system recognized in this report is a cementitious walking deck used directly over plywood substrates. The system has a Class A fire classification, when tested in accordance with ASTM E108, and installed in accordance with Section 4.0 of this report.

3.2 Wind Resistance: The maximum allowable wind loads are limited by the capacity of the deck construction. The decking must be designed to withstand wind pressures determined in accordance with Section 1609.5.1 of the IBC.

4.0 PRODUCT DESCRIPTION

4.1 General: Environmental Building Products' Enduro-Kote walking deck and roof covering system is a cementitious multi-layer protective coating system for use over plywood substrates. The system consists of cementitious base coatings (EKC), embedded with a corrosion resistant metal lath, a textured coating and an acrylic color coat.

4.1.1 Components:

- **Base Coat** – The Base Coat consists of a mixture of one 46 pound (20.9 kg) bag of EKC

cementitious powder and 1-gallon (3.8 L) of EKL acrylic emulsion. Bags of EKC have a shelf life of 1-year when stored in unopened containers and dry conditions at temperatures between 50°F and 95°F (13°C and 32°C). 5-gallon (18.9 L) containers of EKL have a shelf life of 1-year when stored in unopened containers and at temperatures between 50°F and 95°F (13°C and 32°C).

- **Metal Lath** - Minimum 2.5 pound-per-square-yard (1.36 kg/m²) galvanized diamond-mesh expanded metal lath complying with ASTM C847.
- **Texture Coat** – same as base coat, see above.
- **Topcoat** – An acrylic color coat provided in 5-gallon (18.9 L) containers. Unopened containers have a shelf life of 1-year when stored at temperatures of between 50°F and 95°F (13°C and 32°C).

4.2 Installation: The Enduro-Kote walking deck and roof covering system shall be installed in accordance with the manufacturer's published installation instructions, the applicable code, and this report. Coatings can be applied within a temperature range of 50°F to 95°F (10°C to 35°C). Coatings shall not be applied when subject to wet weather. Substrates and all coating surfaces shall be structurally sound, clean, dry, and sloped to meet the minimum requirements of the applicable code.

4.2.1 Substrates: Wood based substrates shall be minimum nominal 5/8-inch (15.9 mm) thick, have tongue and groove edges, and be exterior grade complying with U.S. DOC PS-1, in accordance with the applicable code. Edges shall be blocked. Penetrations and terminations of the sheathing shall be protected with metal flashing. Metal flashing shall be minimum 26 gage [0.019 inch (0.48 mm)], corrosion-resistant, and shall extend a minimum of 2-inches (51 mm) onto the sheathing.

4.2.2 Lath: Metal lath with no overlap at seams shall be fastened to the plywood substrate with minimum No. 16 gage corrosion-resistant staples, minimum 5/8-inch-long (15.9 mm) with 7/8-inch (22.2 mm) crown, uniformly distributed with not less than 24 fasteners per square foot (0.0929 m²). The metal lath shall lap metal flashing a minimum of 2-inches (50.8 mm).

4.2.3 Base Coat (EKC): Base Coat is mixed per instructions on the bag and poured and troweled over the metal lath in two layers. The first layer of EKC shall be nominally 1/8-inch (3.2 mm) thick and fully cover the metal lath. Coverage rate is approximately 46 square feet (4.27 m²) per 46-pound (20.9 kg) bag of EKC and 1-gallon (3.8 L) of EKL acrylic emulsion. The first coat shall air cure for a minimum of 2 hours before the second coat is applied. The second layer of Base Coat is identical to the first coat except

The product described in this Uniform Evaluation Service (UES) Report has been evaluated as an alternative material, design or method of construction in order to satisfy and comply with the intent of the provision of the code, as noted in this report, and for at least equivalence to that prescribed in the code in quality, strength, effectiveness, fire resistance, durability and safety, as applicable, in accordance with IBC Section 104.11. This document shall only be reproduced in its entirety.





Originally Issued: 05/16/2017

Valid Through: 05/31/2018

applied to a minimum thickness of 1/16-inch (1.6 mm) with a coverage rate of approximately 92 square feet (8.55 m²). The second coat shall air cure for 24 hours before application of the Texture Coat.

4.2.4 Texture Coat: Texture Coat is spray applied over the Base Coat. The coating is applied to a minimum thickness of 1/16-inch (1.6 mm) with a coverage rate of approximately 92 square feet (8.55 m²). The Texture Coat shall cure a minimum of 24 hours.

4.2.5 Color Coat (EKS): Color Coat (EKS) is roller applied in two coats at a coverage rate of 180 square feet (16.72 m²) per gallon. The Color Coat can be applied within a temperature range of 50°F to 95°F (10°C to 35°C). Color Coat shall not be applied when subject to wet weather.


4.3 Fire Classification: Environmental Building Products' Enduro-Kote walking deck and roof covering system when installed in accordance with this report at a slope of one unit vertical in 48 units horizontal (2-percent slope) has a Class A fire classification, when tested in accordance with ASTM E108.

4.4 One-hour Fire-resistance-rated Assembly: Environmental Building Products' Enduro-Kote walking deck and roof covering system when installed in accordance with this report over minimum 5/8-inch (15.9 mm) thick plywood substrate supported by minimum nominal 2x10 wood joists spaced 16-inches (406 mm) on center with 5/8-inch (15.9 mm) thick Type X gypsum board fastened to the exposed faces of the joists has a one-hour fire-resistance rating when tested in accordance with ASTM E119. The assembly may be considered equivalent to the double wood floor over wood joists spaced 16" on center floor or roof construction noted in IBC Table 721.1(3), Item Number 13.

4.5 Repairs: Damaged areas must be cleared of all existing material and replaced in the manner described in Section 4.2 of this report. In the event of damaged substrates, the fire classification and strength properties must be investigated and the results submitted to the authority-having-jurisdiction (AHJ).

5.0 IDENTIFICATION

Each of the coating components described in Section 4.0 of this report bears a label noting the manufacturer's name (Environmental Building Products), address, product name, shelf life, a batch number keyed to the date of manufacture, the approved inspection agency (Ramtech Laboratories), and evaluation report number (ER-483). Either UES Mark of Conformity may be used as shown below:

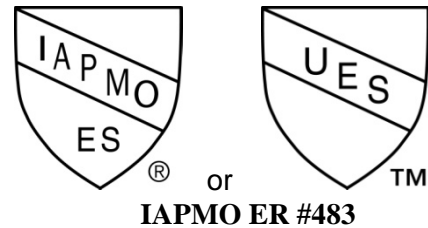

6.0 SUBSTANTIATING DATA

Data in accordance with ICC-ES AC39, dated April 2011 (revised August 2013), data in accordance with ASTM E108, manufacturer's descriptive literature and installation instructions. Test results are from laboratories in compliance with ISO/IEC 17025.

Environmental Building Products' Enduro-Kote walking deck and roof covering system is manufactured in Anaheim, California, under a quality control program with inspections by Ramtech Laboratories.

7.0 CONTACT INFORMATION

Environmental Building Products
1133 North Patt Street
Anaheim, California 92801
www.endurokote.com

8.0 STATEMENT OF RECOGNITION

This evaluation report describes the results of research carried out by IAPMO Uniform Evaluation Service on Environmental Building Products' Enduro-Kote walking deck and roof covering system to assess conformance to the codes and standards shown in Section 1.0 of this report and documents the product's certification.

Brian Gerber, P.E., S.E.
Vice President, Technical Operations
Uniform Evaluation Service

Richard Beck, PE, CBO, MCP
Vice President, Uniform Evaluation Service

GP Russ Chaney
CEO, The IAPMO Group

For additional information about this evaluation report please visit www.uniform-es.org or email at info@uniform-es.org